## **Berridge L-Panel**

Versatile, maintenance-free, prefinished metal liner or soffit panels for open spans.


- Available in 24 & 22 gauge steel & 0.032 aluminum (Consult BMC for 22 gauge)
- Concealed fasteners
- Optional vee-grooves
- Optional stucco embossed texture
- · Panel may be vented
- Open framing or solid sheathing
- ASTM E-1592
- Miami-Dade Approved
- Site-form using Berridge FP-16 portable roll former
  Unless otherwise noted, all testing is for steel only



Berridge L-Panel is an economical and versatile panel for fascia, soffit, liner and ceiling applications. Available with 2 grooves, 1 groove or no grooves as shown above.




Berridge L-Panel is a great soffit panel and can be site-formed with the FP-16 portable roll former.



Vented L-Panel provides 5.19 square inches of Net Free Vent Area (NFVA) per lineal foot of panel. Note: Berridge Manufacturing Company does not recommend this product in applications subject to aggressive atmospheres, marine environments or high humidity due to the corrosive nature of these environments on raw edges of steel.



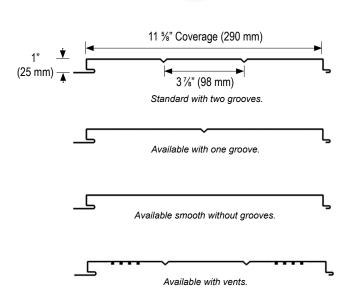

## **SPECIFICATIONS**

(Complete specifications available at www.berridge.com)

## **PRODUCT**

Furnish and install Berridge L-Panel wall and soffit system as manufactured by Berridge Manufacturing Company, San Antonio, Texas.

## MANUFACTURE:

Berridge L-Panel shall have an 11%" exposure and a panel depth of 1". Panels are available from the factory in continuous lengths to a maximum of 40'-0" or can be site-formed with Berridge model FP-16 portable roll former. Panel is available with optional vee grooves, optional embossing, or optional vented profile for soffit applications.

MATERIALS, FINISH INFORMATION & CONSTRUCTION DETAILS: Reference web site: www.berridge.com



Berridge Manufacturing Company 6515 Fratt Road San Antonio, Texas 78218 (800) 669-0009 • www.berridge.com