




AT A GLANCE:

- 17" standard coverage, 26 ga.
- 13", 17" & 21" standard coverage, 24 ga.
- 1" lock forming rib
- Minimum slope 2:12
- 19 WXL stock colors, plus galvalume, 26 ga.
- 5 PVDF stock colors, 26 ga.
- 32 PVDF stock colors, plus galvalume, 24 ga.
- UL Class A Fire rating
- UL Class IV Impact rating

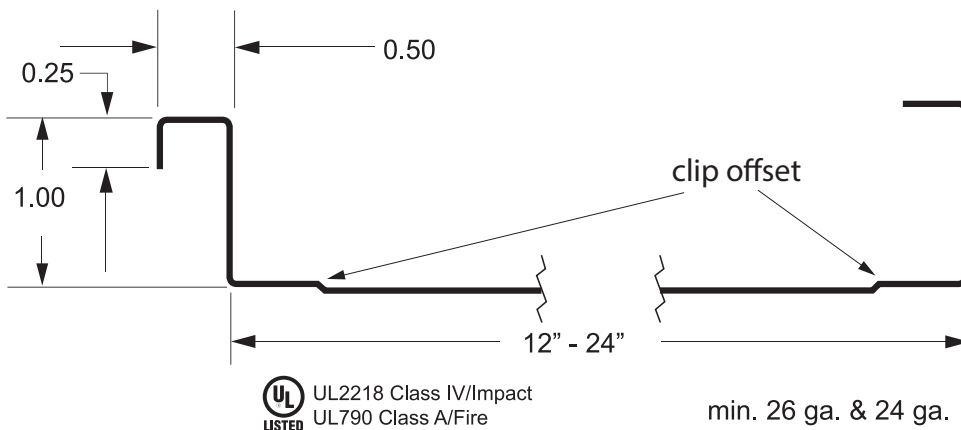

LF1 Panel -- is an architectural flat pan panel with a 1" standing seam that is mechanically seamed. Panels are typically used over a solid deck, but can be used over closely spaced open purlins. Panels are available in both 26 ga. and 24 ga. and include clip offsets. Minimum recommended slope is 2:12. Pan striations required for all 26 ga. panels.