


STRONGSEAM™ PANELS SL15 PANEL



AT A GLANCE:

- 16" coverage, 26 ga.
- 12", 16" & 18" coverage, 24 ga.
- 1 ½" snaplock rib
- Minimum slope 3:12
- Requires solid decking
- 19 WXL stock colors, plus galvalume, 26 ga.
- 5 PVDF stock colors, 26 ga.
- 32 PVDF stock colors, plus galvalume, 24 ga.
- UL Class A Fire rating
- UL Class IV Impact rating

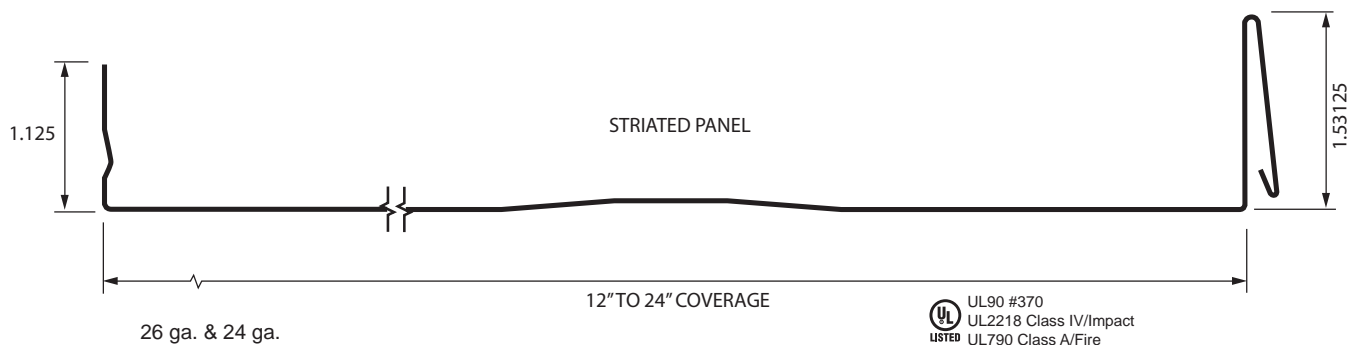

SL15 Panel -- is a snap-together architectural panel with a 1½" standing seam, typically used over a solid deck. Available in both 26 ga. and 24 ga. Minimum recommended slope is 3:12. Pan striations required for all 26 ga. panels.