




PRODUCT INFORMATION

Kansas City:
8341 Ruby Ave.
Kansas City, KS 66111
913-766-7200
855-818-4958 toll-free
913-766-7201 fax

Tulsa:
131 S. 147th E. Ave.
Tulsa, OK 74116
918-641-0641
866-674-7657 toll-free
918-641-0640 fax

STRONGSEAM™ PANELS 7.2 PANEL

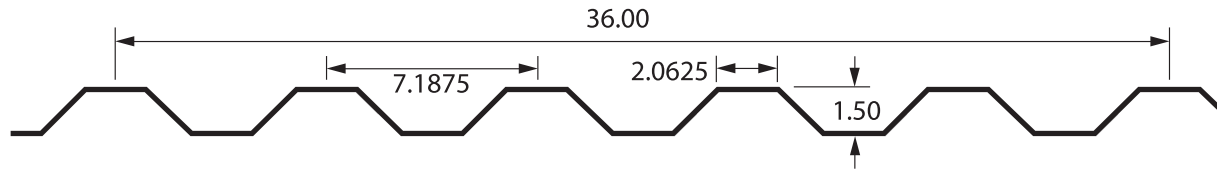

7.2 Roof Panel

ALLOWABLE UNIFORM LOADS IN POUNDS PER SQUARE FOOT

24 Gauge (0.0223"), Fy = 50 ksi, Fu = 60 ksi								
SPAN TYPE	LOAD TYPE	SPAN IN FEET						
		3.0	4.0	5.0	6.0	7.0	8.0	9.0
1-span	NEGATIVE WIND LOAD	251.48	141.46	90.53	62.87	46.19	35.36	27.94
	LIVE LOAD/DEFLECTION	202.14	135.78	69.52	40.23	25.33	16.97	11.92
2-span	NEGATIVE WIND LOAD	253.79	147.73	96.14	67.39	49.79	38.27	30.31
	LIVE LOAD/DEFLECTION	156.28	117.21	88.20	61.73	45.57	35.00	27.71
3-span	NEGATIVE WIND LOAD	307.17	181.07	118.61	83.46	61.81	47.58	37.73
	LIVE LOAD/DEFLECTION	177.59	133.19	106.55	76.57	53.77	36.02	25.30
4-span	NEGATIVE WIND LOAD	289.91	170.16	111.21	78.15	57.83	44.49	35.27
	LIVE LOAD/DEFLECTION	170.93	128.19	102.17	71.66	52.97	38.84	27.28

22 Gauge (0.0286"), Fy = 50 ksi, Fu = 60 ksi								
SPAN TYPE	LOAD TYPE	SPAN IN FEET						
		3.0	4.0	5.0	6.0	7.0	8.0	9.0
1-span	NEGATIVE WIND LOAD	346.31	194.80	124.67	86.58	63.61	48.70	38.48
	LIVE LOAD/DEFLECTION	322.96	181.52	92.94	53.78	33.87	22.69	15.94
2-span	NEGATIVE WIND LOAD	357.18	205.97	133.40	93.26	68.79	52.81	41.80
	LIVE LOAD/DEFLECTION	199.38	149.54	119.63	85.47	63.01	48.35	38.26
3-span	NEGATIVE WIND LOAD	435.96	253.83	165.20	115.80	85.57	65.76	52.09
	LIVE LOAD/DEFLECTION	226.57	169.93	135.94	106.25	71.31	47.77	33.55
4-span	NEGATIVE WIND LOAD	410.29	238.09	154.70	108.33	80.00	61.46	48.67
	LIVE LOAD/DEFLECTION	218.07	163.56	130.84	99.36	73.31	51.25	35.99

Notes:

- Strength calculations based on the 2012 AISI Standard "North American Cold-formed Steel Structural Members."
- Allowable loads are applicable for uniform loading and spans without overhangs.
- LIVE LOAD/DEFLECTION load capacities are for those loads that push the panel against its supports. The applicable limit states are flexure, shear, combined shear and flexure, web crippling at end and interior supports, and a deflection limit of L/60 under strength-level loads.
- NEGATIVE WIND LOAD capacities are for those loads that pull the panel away from its supports. The applicable limit states are flexure, shear, combined shear and flexure, and a deflection limit of L/60 under 10-year wind loading.
- Panel pullover and Screw pullout capacity must be checked separately using the screws employed for each particular application when utilizing this load chart.

- Effective yield strength has been determined in accordance with section A2.3.2 of the 2012 NAS specification.
- The use of any accessories other than those provided by the manufacturer may damage panels, void all warranties and will void all engineering data.
- This material is subject to change without notice. Please contact MPI for most current data.

The Engineering data contained herein is for the expressed use of customers and design professionals. Along with this data, it is recommended that the design professional have a copy of the most current version of the *North American Specification for the Design of Cold-Formed Steel Structural Members* published by the American Iron and Steel Institute to facilitate design. This Specification contains the design criteria for cold-formed steel components. Along with the Specification, the designer should reference the most current building code applicable to the project jobsite in order to determine environmental loads. If further information or guidance regarding cold-formed design practices is desired, please contact the manufacturer.