



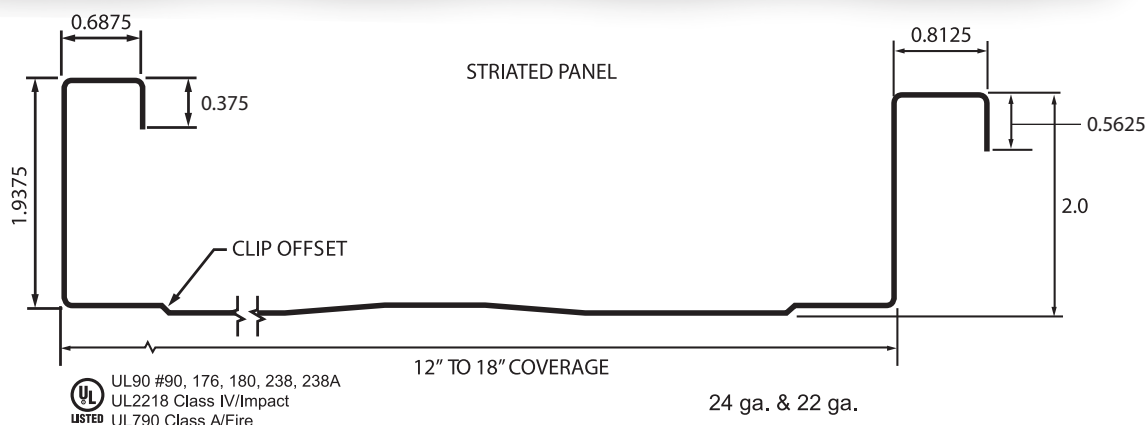

AT A GLANCE:

- 16" and 18" standard coverage, 24 ga.
- 24 and 22 Gauge Steel
- 2" lock forming rib
- Minimum slope 0.5:12
- Male/female return leg for strength
- Smooth, striated or 2-bead
- 32 PVDF stock colors, plus galvalume, 24 ga.
(22 ga. by special order)
- UL Class A Fire rating
- UL Class IV Impact rating

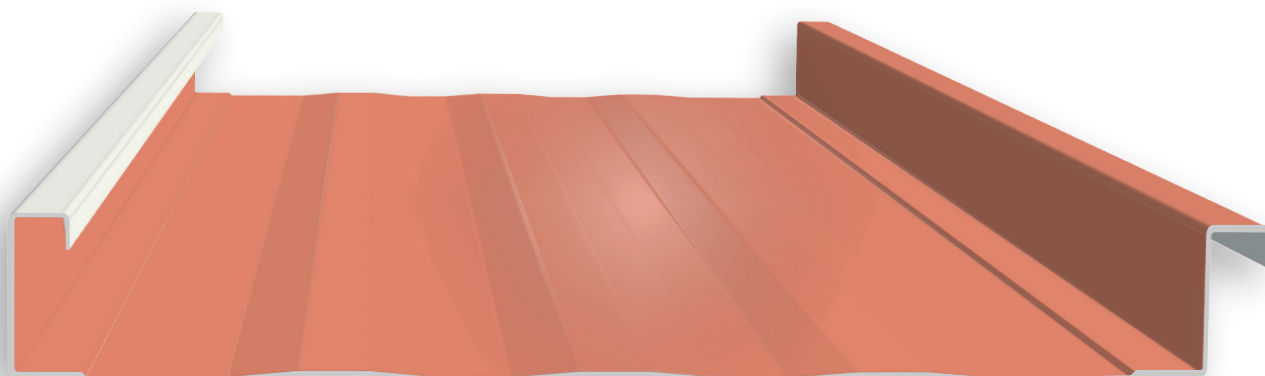

LF2A Panel -- is a mechanically-seamed architectural/structural standing seam roof system for use over open purlins or a solid deck. This panel features a return leg on both the male and female seams that help increase strength and wind uplift resistance. Minimum recommended slope is 0.5:12. Panels can be ordered as smooth, striated or two-bead.