
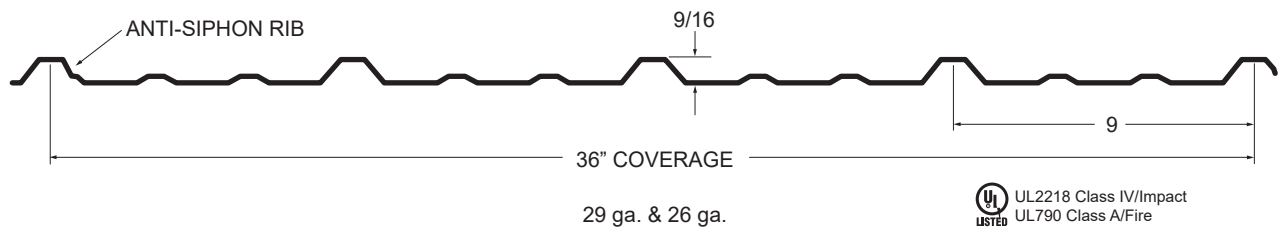


**AT A GLANCE:**

- 36" coverage
- 9/16" rib, 9" centers
- Minimum slope 3:12 with sealant
- 17 WXL stock colors plus galvalume, 29 ga.
- 27 WXL stock colors plus galvalume, 26 ga.
- 7 PVDF stock colors plus galvalume, 24 ga.
- UL Class A Fire rating
- UL Class IV Impact rating

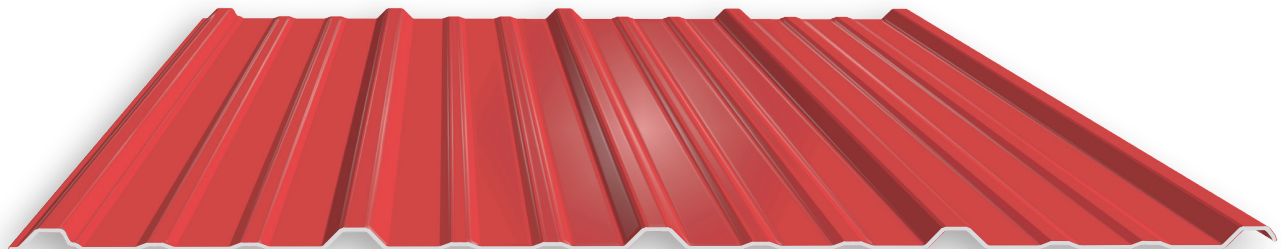

Flat-Loc -- a low profile, stout-ribbed panel ideally suited for roofing or post-frame buildings. Manufactured in 29 ga., 26 ga., and 24 ga. Minimum recommended slope is 3:12 with sealant.