
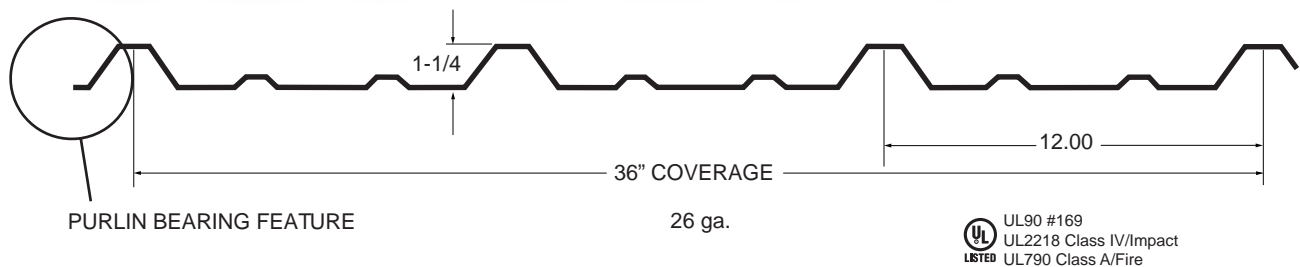


**AT A GLANCE:**

- 36" coverage
- 1 ¼" rib, 12" centers
- Minimum slope 1:12 with sealant
- Purlin bearing feature
- 27 WXL stock colors plus galvalume, 26 ga.
- 7 PVDF stock colors plus galvalume, 24 ga.
(22 ga. by special order)
- UL Class A Fire rating
- UL Class IV Impact rating

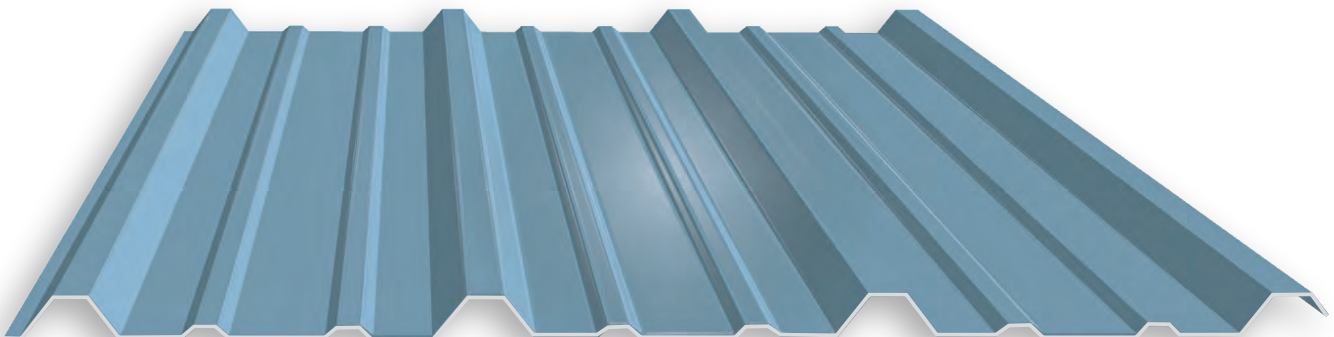

PBR Panel -- a higher-ribbed profile that is ideal for pre-engineered metal buildings. R-panels offer a high-strength, attractive profile and long-lasting performance. Manufactured in 26 ga. and 24 ga., and available in 22 ga. by special order. Minimum recommended slope is 1:12 with sealant.