
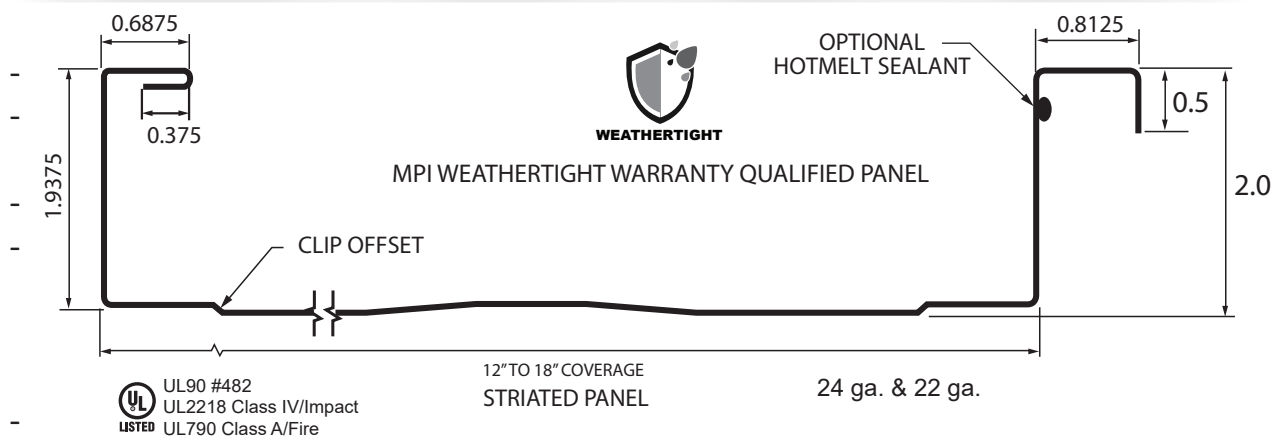


**AT A GLANCE:**

- 16" and 18" standard coverage, 24 ga.
- 24 and 22 Gauge Steel
- 2" lock forming rib
- Minimum slope 0.5:12
- Smooth, striated or 2-bead
- 32 PVDF stock colors, plus galvalume and glossy white, 24 ga. (22 ga. by special order)
- UL Class A Fire rating
- UL Class IV Impact rating

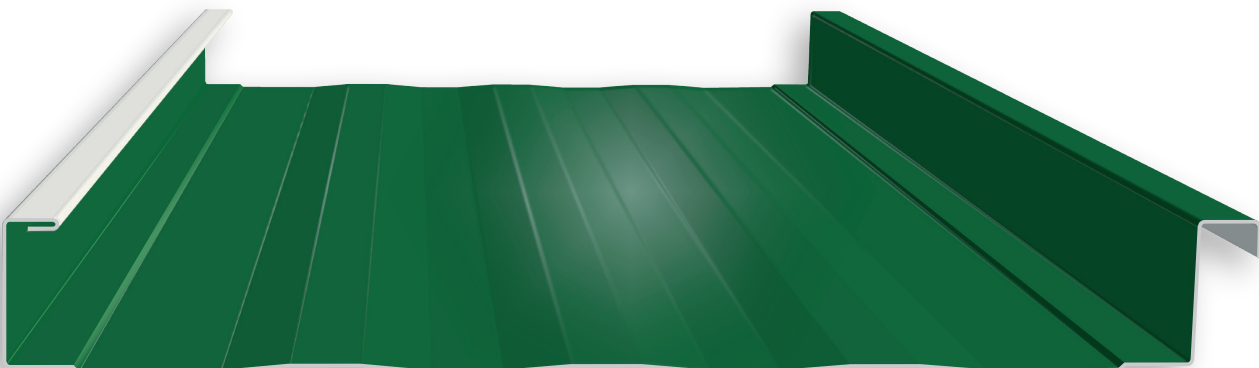

LF2 Panel -- is an architectural/structural standing seam roof system for use over open purlins or a solid deck. The panel features a 2" standing seam that is mechanically seamed in a single or double lock configuration. Minimum recommended slope is 0.5:12. Panels can be ordered as smooth, striated or two-bead.