



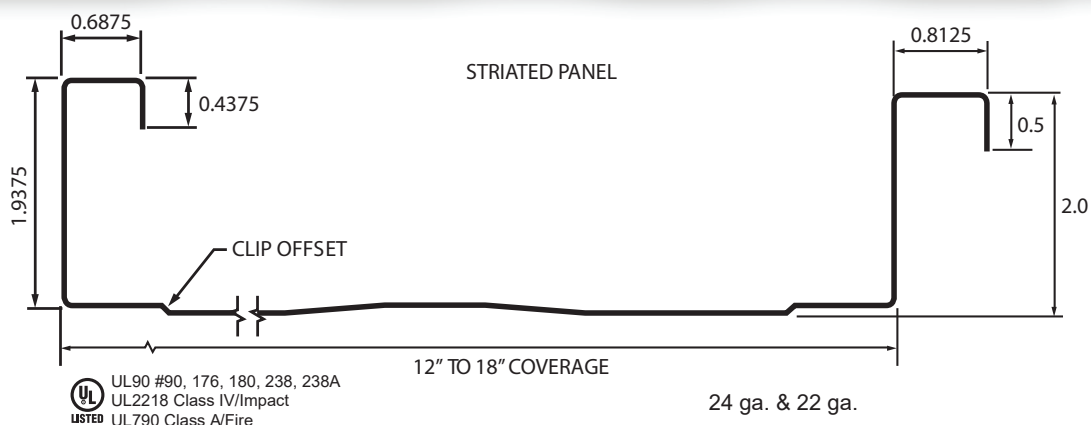

- 16" and 18" standard coverage, 24 ga.
- 24 and 22 Gauge Steel
- 2" lock forming rib
- Minimum slope 0.5:12
- Male/female return leg for strength
- Smooth, striated or 2-bead
- 32 PVDF stock colors, plus galvalume and glossy white, 24 ga. (22 ga. by special order)
- UL Class A Fire rating
- UL Class IV Impact rating

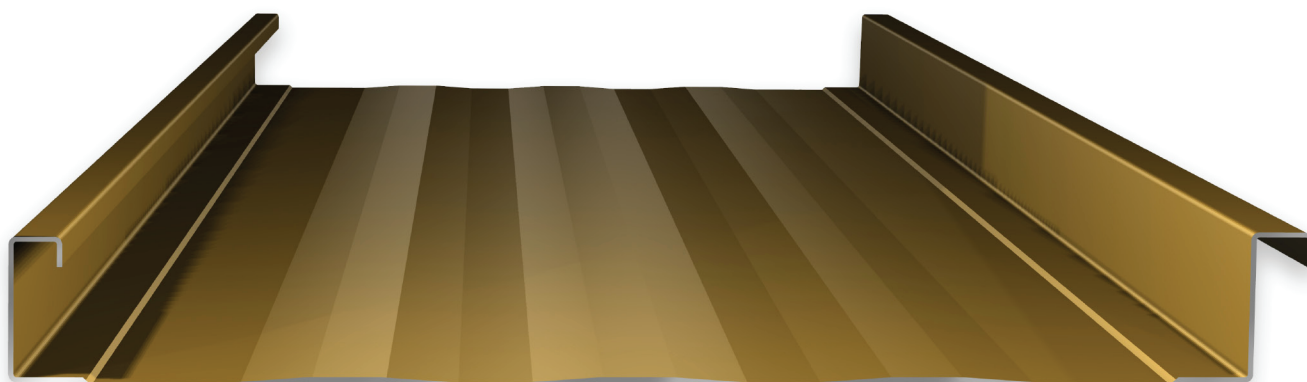

© Metal Panels Inc. 2022 • 866-674-7657 • www.metalpanelsinc.com