




### AT A GLANCE:

- 37 3/8" coverage (32" for 26 ga.)
- 7/8" rib, 2.670" centers
- Minimum Slope 3:12
- 32 PVDF stock colors, plus Galvalume, 24 ga.
- Glossy white, Galvalume, A606 in stock, 22 ga. (other colors by special order)
- Strong and impact resistant
- UL Class A Fire rating
- UL Class IV Impact rating
- As Decking: Conform 22ga. G60 Galvanized



### CURVED PANELS:

- Radius roof curves up to 18"
- Compound curves possible

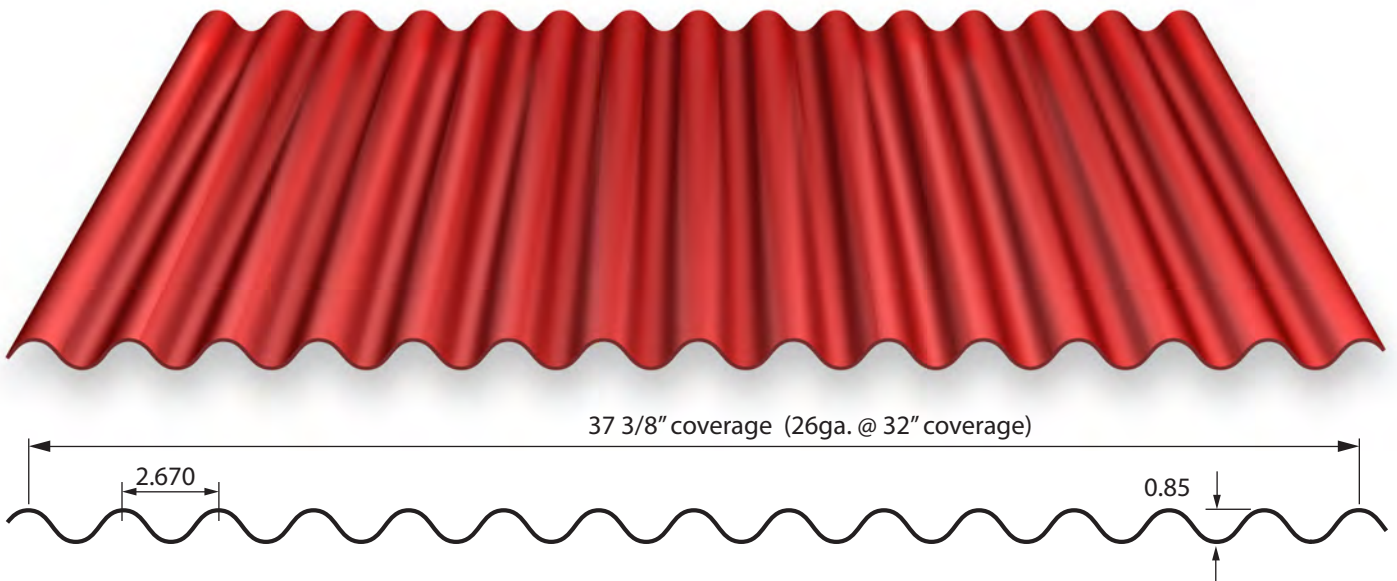

7/8" Corrugated Panel - Structurally strong and incredibly impact resistant, MPI's 7/8" Corrugated Panel is an excellent choice for exterior roofing, siding applications or interior projects. The 7/8" Corrugated Panel is an economical, structural, exposed fastener metal roof and wall panel. Recommended minimum slope, 3:12.